

BUILDING

INDUSTRY

Machine directive 2006/42/CE
Quality Process complying with the ISO 9001 :2015 standard

p.lift 500

I TEMPORARY PERSONNEL LIFTING | Wire rope pneumatic hoist


 PRODUCT OF FRANCE
 MANUFACTURED IN FRANCE

p.lift 500 is a wire rope pneumatic hoist, associated with suspended platforms or cradles, allowing the lifting of people. Its maximum load capacity is 500 kg.

The hoist p.lift 500 can be used worldwide. It is powered by compressed air with a power of 6 bar and an air flow rate of 1.4 m³/min.




CONVENIENCE

- ✓ No working height limit
- ✓ Adapts to any type of work site, platform and cradles - ideal for work in a confined atmosphere (silos, tanks, etc.)



SAFETY

- ✓ Load limiter
- ✓ Air lacking main brake system
- ✓ Manual lowering in case of power failure
- ✓ Anti-fall and anti-roll safety system (Overspeed SECURICHUTE or roller SECURISTOP)
- ✓ Travel end stopper (Top end of stroke)
- ✓ Emergency stop punch
- ✓ Express connection on the motor

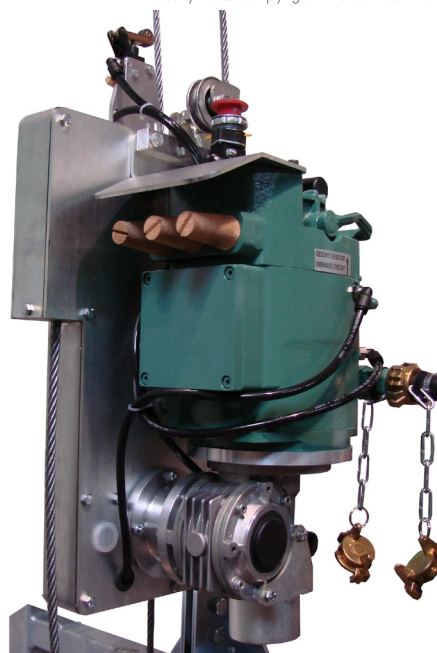

Description	p.lift 500
Working load limit WLL (kg)	500
Hoist weight (kg)	41
Lifting speed (m/min)	9 m/min
Motor power (kW)	0,8
Operating pressure	6 bar
Air flow rate (m ³ /min)	1,4
Emergency descent (m/min)	4,5
Cable characteristics (mm)	8,3 in steel mixed core
Breaking load (kg)	5100
Coefficient of safety	10.2

For more information :
www.fixator.com



FIXATOR
 SAFETY AT THE VERY TOP

